

ANDRIS LUX ECO



The first energy saving compact electronic water heater

- / Up to 14% energy savings with ECO EVO mode
- / Electronic thermostat to control the temperature
- / Smart display to read and adjust the temperature
- / ABS hygiene and safety package
- / Titanium enamelling
- / Copper electric heating element
- / Large dimension magnesium anode

ENERGY CLASS



Powered by
CoreTECH
Advanced electronic thermostat



TECHNICAL DATA

		ANDRIS LUX ECO 6	ANDRIS LUX ECO 6 U	ANDRIS LUX ECO 10	ANDRIS LUX ECO 10 U	ANDRIS LUX ECO 15	ANDRIS LUX ECO 15 U	ANDRIS LUX ECO 30
Nominal Capacity	l	6	6	10	10	15	15	30
Installation	Oversink			Oversink	Undersink	Oversink	Undersink	Oversink
	Undersink							
Output	kW	1,5	1,5	1,2	1,2	1,2	1,2	1,5
Voltage	V	220	220	220/240	220/240	220/240	220/240	220/240
Heating time (ΔT= 45°C)	h. mins	0,15	0,15	0,30	0,30	0,45	0,45	1,10
Max. operating temp.	°C	75	75	80	80	80	80	80
Heat dispersion at 65°C	kWh/24h	0,46	0,46	0,46	0,71	0,61	0,61	0,77
Max. operating pressure	bar	6	6	8	8	8	8	8
Net weight	kg	5,1	5,1	6,6	6,6	7,4	7,4	12,8
Protection	IP	X4	X4	X4	X4	X4	X4	X4


OVERALL DIMENSIONS

	mm	315	315	360	360	360	360	446
a	mm	315	315	294	294	342	342	406
b	mm	250	250	144	144	144	144	165
c	mm	92	92	92	92	78	78	115
d	mm							

ANDRIS LUX ECO	6	6U	10	10 U	15	15 U	30
Energy class	A	A	A	A	A	A	A
Tapping profile	XXS	XXS	XXS	XXS	XXS	XXS	S
CODE	3626236	3626237	3100345	3100346	3100349	3100350	3100353

ACCESSORIES

	Code
Hydraulic safety group 1/2"	877084
Syphon 1"	877086

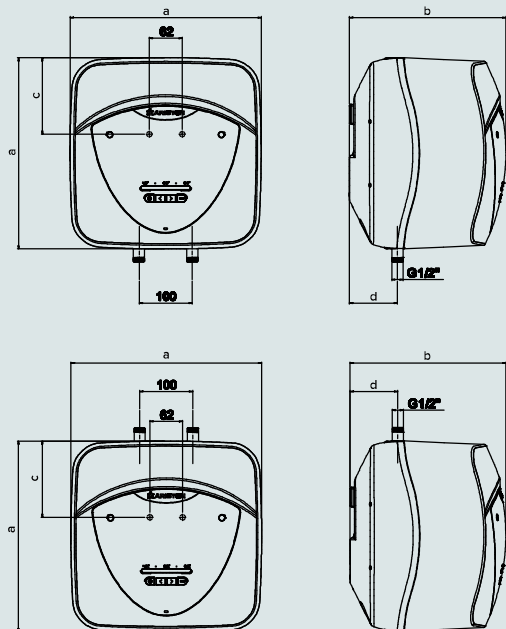

Description	N° of units per pallet
ANDRIS LUX ECO 10/5	45
ANDRIS LUX ECO 10U/5	45
ANDRIS LUX ECO 15/5	40
ANDRIS LUX ECO 30/5	24

NOTE: The Nominal capacity listed in this catalogue identifies the product category. The actual product capacity is listed in the relative technical documentation.